

**155 Mb/s, 2x5 SC Package, BIDI  
TX 1510/RX 1570, TX 1570/RX 1510 nm  
Single mode, 100 – 120 km Distance**

**Description**

The bi-directional (BIDI) transceiver product is unique in that only one single fiber (single mode or multimode) is required to transmit and receive signals simultaneously. That means the total bandwidth capacity of an existing cable infrastructure can be doubled instantly. The typical design of a BIDI transceiver uses a 1510 nm LD to transmit and 1570 nm PD to receive, and vice versa for the matching one (1510 nm to receive and 1570 nm to transmit) at the other end to make a complete link.


OptixCom's BIDI transceivers utilize advanced filter optics to separate the two wavelength with more than 45 dB of isolation. The products use industry standard 2x5 pluggable package. These transceivers operate at 155 Mb/s for 100 - 120 km transmission distance with single mode fibers. The products are RoHS compliant.



**BD5-155T1R7-DPXXXK**  
**BD5-155T7R1-DPXXXK**  
**(XXX = 100, 120)**



155 Mb/s, 2<sup>23</sup>-1 NRZ Data Eye Pattern

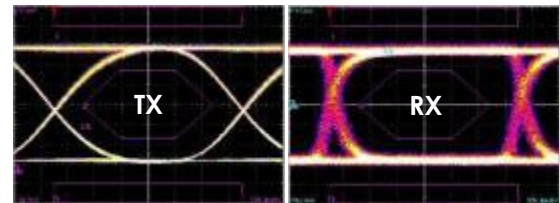

**Key Features**

- Single mode, 155 M/s data rate
- TX 1510/RX 1570 and TX 1570/RX1510 matching pair
- 100 - 120 km reach and single 3.3 V power supply
- 28 – 32 dB power budget
- Industry standard 2x5 pluggable package
- Single SC connector optical interface
- DC coupling LVPECL differential I/O logics
- LVPECL Signal detect to monitor optical signals
- RoHS compliant

**Applications**

- ✓ FTTH, Ethernet, ATM/SONET , SDH STM-1
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter, bus extension
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

**Ordering Information**

**Part Number:** BD5-155T1R7-DPXXXK  
**Description:**  
155 Mb/s, Single mode, 2x5 BIDI Transceiver, TX 1510 nm and RX 1570 nm, XXX km reach, 0 – 70 °C.

**Part Number:** BD5-155T7R1-DPXXXK  
**Description:**  
155 Mb/s, Single mode, 2x5 BIDI Transceiver, TX 1570 nm and RX 1510 nm, XXX km reach, 0 – 70 °C.

**Operating Conditions**

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
Data Rate	---	155	200	Mb/s
Supply Voltage	3.1	3.3	3.5	V
Supply Current	---	200	300	mA

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	$T_{st}$	-40	85	°C
Supply Voltage	$V_{cc}$	-0.5	4.0	V
Input Voltage	$V_{in}$	-0.5	$V_{cc}$	V
Operating Current	$I_{op}$	---	400	mA
Output Current	$I_o$	---	50	mA
Soldering Temperature (10 sec. on leads)	$T_{sd}$	---	260	°C

### General Transmitter Characteristics (DFB Laser)

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage <sup>1</sup>	$\Delta V_i$	0.3	---	1.6	V
Differential Input Impedance <sup>2</sup>	$Z$	---	100	---	ohm
Relative Intensity Noise	$RIN$	---	---	-120	dB/Hz
Rise/Fall Time (10% - 90%)	$T_r/T_f$	---	1	2	ns
Data Input Current - High	$I_{IH}$	---	---	350	$\mu A$
Data Input Current - Low	$I_{IL}$	-350	---	---	$\mu A$
Data Input Voltage - High	$V_{IH}$	$V_{cc} - 1.1$	---	$V_{cc} - 0.7$	V
Data Input Voltage - Low	$V_{IL}$	$V_{cc} - 2.0$	---	$V_{cc} - 1.6$	V

### General Receiver Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Output Voltage <sup>1</sup>	$\Delta V_o$	0.3	---	1.6	V
Differential Input Impedance <sup>2</sup>	$Z$	---	100	---	Ohm
Optical Return Loss	$OL$	14	---	---	dB
Rise/Fall Time (10% - 90%)	$T_r/T_f$	---	1	2	ns
Signal Detect Hysteresis	$P_{SD+} - P_{SD}$	1	---	---	dB
Crosstalk		---	---	-45	dB
Signal Detect Output - High	$V_{SD+}$	$V_{cc} - 1.1$	---	$V_{cc} - 0.7$	V
Signal Detect Output - Low	$V_{SD-}$	$V_{cc} - 2.0$	---	$V_{cc} - 1.6$	V
Data Output Voltage - High	$V_{OH}$	$V_{cc} - 1.1$	---	$V_{cc} - 0.7$	V
Data Output Voltage - Low	$V_{OL}$	$V_{cc} - 2.0$	---	$V_{cc} - 1.6$	V

Notes:

1. Module is designed for DC LVPECL coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.

### Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power <sup>1</sup>	$P_o$	-5	---	+2	dBm
Optical Wavelength (BD5-155T1R7-DP100K)	$\lambda_o$	1500	1510	1520	nm
Optical Wavelength (BD5-155T7R1-DP100K)	$\lambda_o$	1560	1570	1580	nm
Extinction Ratio	$ET$	9	---	---	dB
Spectral Width (rms)	$\Delta\lambda$	---	---	1	nm

### Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength (BD5-155T1R7-DP100K)	$\lambda_c$	1560	1570	1580	nm
Operating Wavelength (BD5-155T7R1-DP100K)	$\lambda_c$	1500	1510	1520	nm
Receiver Overload	$P_{max}$	0	---	---	dBm
Receiver Sensitivity <sup>2</sup>	$P_I$	---	---	-33	dBm
Signal Detect– Asserted	$P_{SD+}$	---	---	-33	dBm
Signal Detect– Deasserted	$P_{SD-}$	-45	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125  $\mu\text{m}$  SMF.
2. Test at 155 Mb/s, 2<sup>23</sup> – 1 PRBS data pattern, and > 1x10<sup>-10</sup> of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with Telcordia GR-253-CORE and ITU-T G-957 standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA.

Class 1 Laser Product  
Complies with  
21 CFR 1040.10 and 1040.11

