

**155 Mb/s, 2x5 SC Package, BIDI  
TX 1510/RX 1570, TX 1570/RX 1510 nm  
Single mode, 100 – 120 km Distance**



**Description**

The bi-directional (BIDI) transceiver product is unique in that only one single fiber (single mode or multimode) is required to transmit and receive signals simultaneously. That means the total bandwidth capacity of an existing cable infrastructure can be doubled instantly. The typical design of a BIDI transceiver uses a 1510 nm LD to transmit and 1570 nm PD to receive, and vice versa for the matching one (1510 nm to receive and 1570 nm to transmit) at the other end to make a complete link.

OptixCom's BIDI transceivers utilize advanced filter optics to separate the two wavelength with more than 45 dB of isolation. The products use industry standard 2x5 pluggable package. These transceivers operate at 155 Mb/s for 100 - 120 km transmission distance with single mode fibers. The products are RoHS compliant.




Lead-Free

**BD5-155T1R7-DPXXXK  
BD5-155T7R1-DPXXXK  
(XXX = 100, 120)**



155 Mb/s, 2<sup>23</sup>-1 NRZ Data Eye Pattern

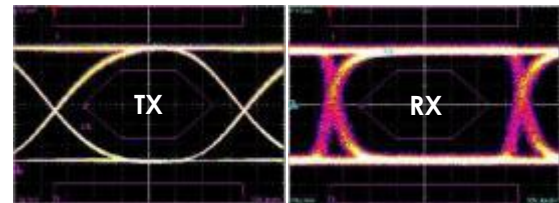

**Key Features**

- Single mode, 155 M/s data rate
- TX 1510/RX 1570 and TX 1570/RX1510 matching pair
- 100 - 120 km reach and single 3.3 V power supply
- 28 – 32 dB power budget
- Industry standard 2x5 pluggable package
- Single SC connector optical interface
- DC coupling LVPECL differential I/O logics
- LVPECL Signal detect to monitor optical signals
- RoHS compliant

**Applications**

- ✓ FTTH, Ethernet, ATM/SONET , SDH STM-1
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter, bus extension
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

**Ordering Information**

**Part Number:** BD5-155T1R7-DPXXXK

**Description:**

155 Mb/s, Single mode, 2x5 BIDI Transceiver, TX 1510 nm and RX 1570 nm, XXX km reach, 0 – 70 °C.

**Part Number:** BD5-155T7R1-DPXXXK

**Description:**

155 Mb/s, Single mode, 2x5 BIDI Transceiver, TX 1570 nm and RX 1510 nm, XXX km reach, 0 – 70 °C.

**Operating Conditions**

| Parameter           | Min. | Typical | Max. | Units |
|---------------------|------|---------|------|-------|
| Operate Temperature | 0    | 25      | 70   | °C    |
| Data Rate           | ---  | 155     | 200  | Mb/s  |
| Supply Voltage      | 3.1  | 3.3     | 3.5  | V     |
| Supply Current      | ---  | 200     | 300  | mA    |

**U.S.A. Office: Optix Communications, Inc.**

17901 Von Karman Avenue, Suite 600,  
Irvine, CA 92614

Tel: (949) 679-5712 Fax: (949) 420-2134

<http://www.OptixCom.com>

<http://www.OpticalTransceiver.com>

Email: [Support@OptixCom.com](mailto:Support@OptixCom.com)

**Germany Office: OptixCom GmbH**

Freiherr vom Stein Strasse 19, 60323  
Frankfurt am Main, Germany

Tel: +49 (0)69 7953-3646

### Absolute Maximum Ratings

| Parameter                                | Symbol   | Min. | Max.     | Units |
|--|----------|------|----------|-------|
| Storage Temperature                      | $T_{st}$ | -40  | 85       | °C    |
| Supply Voltage                           | $V_{cc}$ | -0.5 | 4.0      | V     |
| Input Voltage                            | $V_{in}$ | -0.5 | $V_{cc}$ | V     |
| Operating Current                        | $I_{op}$ | ---  | 400      | mA    |
| Output Current                           | $I_o$    | ---  | 50       | mA    |
| Soldering Temperature (10 sec. on leads) | $T_{sd}$ | ---  | 260      | °C    |

### General Transmitter Characteristics (DFB Laser)

| Parameter                                 | Symbol       | Min.           | Typical | Max.           | Units |
|---|--------------|----------------|---------|----------------|-------|
| Differential Input Voltage <sup>1</sup>   | $\Delta V_i$ | 0.3            | ---     | 1.6            | V     |
| Differential Input Impedance <sup>2</sup> | $Z$          | ---            | 100     | ---            | ohm   |
| Relative Intensity Noise                  | $RIN$        | ---            | ---     | -120           | dB/Hz |
| Rise/Fall Time (10% - 90%)                | $T_r/T_f$    | ---            | 1       | 2              | ns    |
| Data Input Current - High                 | $I_{IH}$     | ---            | ---     | 350            | μA    |
| Data Input Current - Low                  | $I_{IL}$     | -350           | ---     | ---            | μA    |
| Data Input Voltage - High                 | $V_{IH}$     | $V_{cc} - 1.1$ | ---     | $V_{cc} - 0.7$ | V     |
| Data Input Voltage - Low                  | $V_{IL}$     | $V_{cc} - 2.0$ | ---     | $V_{cc} - 1.6$ | V     |

### General Receiver Characteristics

| Parameter                                 | Symbol             | Min.           | Typical | Max.           | Units |
|---|--------------------|----------------|---------|----------------|-------|
| Differential Output Voltage <sup>1</sup>  | $\Delta V_o$       | 0.3            | ---     | 1.6            | V     |
| Differential Input Impedance <sup>2</sup> | $Z$                | ---            | 100     | ---            | Ohm   |
| Optical Return Loss                       | $OL$               | 14             | ---     | ---            | dB    |
| Rise/Fall Time (10% - 90%)                | $T_r/T_f$          | ---            | 1       | 2              | ns    |
| Signal Detect Hysteresis                  | $P_{SD+} - P_{SD}$ | 1              | ---     | ---            | dB    |
| Crosstalk                                 |                    | ---            | ---     | -45            | dB    |
| Signal Detect Output - High               | $V_{SD+}$          | $V_{cc} - 1.1$ | ---     | $V_{cc} - 0.7$ | V     |
| Signal Detect Output - Low                | $V_{SD-}$          | $V_{cc} - 2.0$ | ---     | $V_{cc} - 1.6$ | V     |
| Data Output Voltage - High                | $V_{OH}$           | $V_{cc} - 1.1$ | ---     | $V_{cc} - 0.7$ | V     |
| Data Output Voltage - Low                 | $V_{OL}$           | $V_{cc} - 2.0$ | ---     | $V_{cc} - 1.6$ | V     |

Notes:

1. Module is designed for DC LVPECL coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.

### Transmitter Electro-Optical Characteristics

| Parameter                                  | Symbol          | Min. | Typical | Max. | Units |
|--|-----------------|------|---------|------|-------|
| Optical Output Power <sup>1</sup>          | $P_o$           | -5   | ---     | +2   | dBm   |
| Optical Wavelength<br>(BD5-155T1R7-DP100K) | $\lambda_o$     | 1500 | 1510    | 1520 | nm    |
| Optical Wavelength<br>(BD5-155T7R1-DP100K) | $\lambda_o$     | 1560 | 1570    | 1580 | nm    |
| Extinction Ratio                           | $ET$            | 9    | ---     | ---  | dB    |
| Spectral Width (rms)                       | $\Delta\lambda$ | ---  | ---     | 1    | nm    |

### Receiver Electro-Optical Characteristics

| Parameter                                    | Symbol      | Min. | Typical | Max. | Units |
|--|-------------|------|---------|------|-------|
| Operating Wavelength<br>(BD5-155T1R7-DP100K) | $\lambda_c$ | 1560 | 1570    | 1580 | nm    |
| Operating Wavelength<br>(BD5-155T7R1-DP100K) | $\lambda_c$ | 1500 | 1510    | 1520 | nm    |
| Receiver Overload                            | $P_{max}$   | 0    | ---     | ---  | dBm   |
| Receiver Sensitivity <sup>2</sup>            | $P_I$       | ---  | ---     | -33  | dBm   |
| Signal Detect– Asserted                      | $P_{SD+}$   | ---  | ---     | -33  | dBm   |
| Signal Detect– Deasserted                    | $P_{SD-}$   | -45  | ---     | ---  | dBm   |

Notes:

1. Output of coupling optical power into 9/125  $\mu\text{m}$  SMF.
2. Test at 155 Mb/s, 2<sup>23</sup> – 1 PRBS data pattern, and > 1x10<sup>-10</sup> of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with Telcordia GR-253-CORE and ITU-T G-957 standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA.

**Class 1 Laser Product**  
Complies with  
**21 CFR 1040.10 and 1040.11**

