

155 Mb/s, 850 nm Multimode, 2 km Distance 1x9 Dual SC Package



Description

OptixCom's 1x9 DSC transceiver provides a low cost and compact solution for general data communication links. This multimode fiber optics transceiver is designed with high performance 850 nm VCSEL light source. Dual SC connectors are used as the standard interface.

The transceiver uses industry standard 1x9 pluggable package. It operates at 155 Mb/s and reaches 2 km of transmission distance with multimode fibers and >14 dB of power budget. This product is RoHS compliant.




Lead-Free

DSC-155SX-DP2K



155 Mb/s, 2²³-1 NRZ Data Eye Pattern

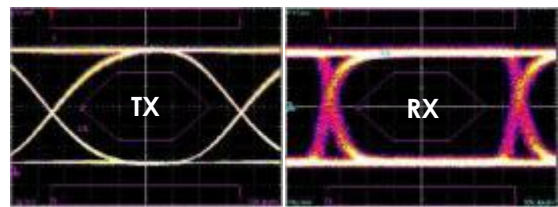

Key Features

- 1550 nm multimode, 155 Mb/s
- >14 dB power budget, 2 km reach
- Duplex SC connector optical interface
- Industry standard 1x9 pluggable package
- DC coupling LVPECL differential I/O logics
- LVPECL Signal detect to monitor optical signals
- Single 3.3V power supply
- -20-85 °C operating temperatures available
- RoHS compliant

Applications

- ✓ FTTH, FTTX, ATM/SONET OC-3, SDH STM-1
- ✓ Fast Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: DSC-155SX-DP2K

Description:

850 nm 155 Mb/s, multimode, 1x9 DSC Fiber Optics Transceiver, 2 km reach, 0-70°C

Part Number: DSC-155SX-DP2K-T

Description:

850 nm 155 Mb/s, multimode, 1x9 DSC Fiber Optics Transceiver, 2 km reach, -20-85°C

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-20	25	85	°C
Data Rate	---	155	200	Mb/s
Supply Voltage	3.1	3.3	3.5	V
Supply Current	---	150	200	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{cc}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{cc}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA
Soldering Temperature (10 sec. on leads)	T_{sd}	---	260	°C

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.3	---	1.6	V
Differential Input Impedance ²	Z	---	100	---	ohm
Optical Output Power ³	P_o	-10	---	-4	dBm
Optical Wavelength	λ_o	830	850	860	nm
Extinction Ratio	ET	9	---	---	dB
Spectral Width (rms)	$\Delta\lambda$	---	---	0.85	nm
Total Jitter	T_J	---	---	1	ns
Rise/Fall Time (10% - 90%)	T_r/T_f	---	---	2	ns
Data Input Voltage – High	V_{IH}	$V_{cc} - 1.1$	---	$V_{cc} - 0.7$	V
Data Input Voltage - Low	V_{IL}	$V_{cc} - 2.0$	---	$V_{cc} - 1.6$	V

Notes:

1. Module is designed for DC LVPECL coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.
3. Output of coupling optical power into 50/125 or 62.5/125 μ m MMF.
4. Optical eye diagram is compliant with Telcordia GR-253-CORE and ITU-T G-957 standard.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	770	---	860	nm
Receiver Overload	P_{max}	0	---	---	dBm
Receiver Sensitivity ¹	P_I	---	---	-24	dBm
Differential Output Voltage	ΔV_o	0.3	---	1.6	V
Differential Input Impedance ²	Z	---	100	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time (10% - 90%)	T_r/T_f	---	---	3	ns
Signal Detect- Asserted	P_{SD+}	---	---	-24	dBm
Signal Detect- Deasserted	P_{SD-}	-45	---	---	dBm
Signal Detect Assert Time	T_{ass}	---	---	100	μ s
Signal Detect Deassert Time	T_{disass}	---	---	100	μ s
Signal Detect Hysteresis	$P_{SD+} - P_{SD-}$	1.0	---	---	dB
Signal Detect Output - Low	V_{SD-}	$V_{CC} - 2.0$	---	$V_{CC} - 1.6$	V
Signal Detect Output - High	V_{SD+}	$V_{CC} - 1.1$	---	$V_{CC} - 0.7$	V
Data Output Voltage - Low	V_{OL}	$V_{CC} - 2.0$	---	$V_{CC} - 1.6$	V
Data Output Voltage - High	V_{OH}	$V_{CC} - 1.1$	---	$V_{CC} - 0.7$	V

Notes:

1. Test at 155 Mb/s, 2²³ - 1 PRBS data pattern, and > 1x10⁻¹⁰ of Bit-Error-Rate (BER).
2. Single ended will be 50 ohm for each signal line.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**

