

Gigabit Interface Converter (GBIC) Optical Transceivers



Features

- 850/1310 nm multimode, 1310/1550 nm single mode, CWDM
- 1.0625 Gb/s and 1.25 Gb/s, up to 80 km
- IEEE 802.3Z, 1000BASE- compliant
- Single 3.3/5 V power supply, duplex SC optical connector
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O, TTL signal detect

Applications

- ✓ Gigabit Ethernet, Fiber Channel
- ✓ High speed I/O bus extension, systems interconnects
- ✓ Industrial control links and media converters
- ✓ Data Communication for SAN and LAN
- ✓ Routers and switches, computer cluster cross-connect



Products Selection Guide

Part Number *	Wavelength	Data Rate	Power Budget	Distance **	Temp. Range
1.25 Gb/s, Multimode Applications					
GBC-1250SX-AT500M	850 nm	1.25 Gb/s	>8.5 dB	500 m	0 – 70/-20 – 85°C
GBC-1250LX-AT2K	1310 nm	1.25 Gb/s	>10 dB	2 km	0 – 70/-40 – 85°C
1.25 Gb/s, 1310 nm, Single Mode Applications, 10 – 50 km					
GBC-1250LX-AT10K	1310 nm	1.25 Gb/s	>10.5 dB	10 km	0 – 70/-40 – 85°C
GBC-1250LX-AT40K	1310 nm	1.25 Gb/s	>20 dB	40 km	0 – 70/-40 – 85°C
GBC-1250LX-AT50K	1310 nm	1.25 Gb/s	>24 dB	50 km	0 – 70/-40 – 85°C
1.25 Gb/s, 1550 nm, Single Mode Applications, 30 – 80 km					
GBC-1250EX-AT30K	1550 nm	1.25 Gb/s	>12 dB	30 km	0 – 70/-40 – 85°C
GBC-1250EX-AT60K	1550 nm	1.25 Gb/s	>20 dB	60 km	0 – 70/-40 – 85°C
GBC-1250EX-AT80K	1550 nm	1.25 Gb/s	>24 dB	80 km	0 – 70/-40 – 85°C
1.25 Gb/s, Single Mode CWDM Applications, 40 – 80 km					
GBC-1250CLX-AT40K-XX	1270 - 1450 nm	1.25 Gb/s	20 dB	40 km	0 – 70 °C
GBC-1250CLX-AT60K-XX	1270 - 1450 nm	1.25 Gb/s	24 dB	60 km	0 – 70 °C
GBC-1250CEX-AT60K-XX	1470 - 1610 nm	1.25 Gb/s	20 dB	60 km	0 – 70 °C
GBC-1250CEX-AT80K-XX	1470 - 1610 nm	1.25 Gb/s	24 dB	80 km	0 – 70 °C

*: Add "-T" in the Part Number for products with extended temperature range -40–85 °C. For example, GBC-1250LX-AT10K-T.

XX indicates wavelength selection for the 1270 - 1450 nm CWDM transceivers. See data sheet for details.

XX indicates wavelength selection for the 1470 – 1610 nm CWDM transceivers. See data sheet for details.

** : The indicated distance is for reference only, not guaranteed specifications. The actual transmission distance depends on system configuration and power budget. For single mode fibers, the typical loss is 0.25 dB/km @ 1550 nm and 0.35 dB/km @ 1310 nm.

1.25 Gb/s, 850 nm Multimode, 500 m GBIC Dual SC Package

Description

OptixCom's multimode fiber optics transceiver is designed with high performance 850 nm VCSEL light source and compliant with Gigabit Interface Converter (GBIC) specifications. This product can be used at 1.0625 Gb/s for Fiber Channel or 1.25 Gb/s for Gigabit Ethernet applications.

The transceiver uses duplex SC connector for the optical interface and SCA-2 host connector for the electrical interface. The product is hot pluggable in the z-axis along the transceiver module. The transceiver reaches more than 500 meters of transmission distance with high-grade multimode fibers and > 8.5 dB of power budget. The products are RoHS compliant.





Lead-Free

GBC-1250SX-AT500M



1.25 Gb/s, 2⁷-1 NRZ Data Eye Pattern



Key Features

- 850 nm multimode, 1.0625/1.25 Gb/s data rates
- > 8.5 dB power budget
- Duplex SC connector optical interface
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O logics
- > 500 m at 1.25 Gb/s with high-grade MMF
- Compliant with IEEE 802.3z, 1000BASE-SX
- Compliant with Fiber Channel Standard
- TTL Signal detect function to monitor optical signals
- -20–85 °C operating temperatures available
- Single 3.3/5 V power supply

Applications

- ✓ Fiber Channel, Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: GBC-1250SX-AT500M

Description:

850 nm 1.0625/1.25 Gb/s, multimode, GBIC fiber optics transceiver, 500 m reach, 0-70°C

* Add "-T" in the Part Number for extended temperature range -20–85 °C, i.e., GBC-1250SX-AT500M-T.

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-20	25	85	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	5.25	V
Supply Current	---	120	250	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{cc}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{cc}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.4	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	ohm
Optical Output Power ³	P_o	-9.5	---	-4	dBm
Optical Wavelength	λ_o	830	850	860	nm
Extinction Ratio	ET	9	---	---	dB
Spectral Width (rms)	$\Delta\lambda$	---	---	0.85	nm
Relative Intensity Noise	RIN	---	---	-117	dB/Hz
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	260	ps
Total Jitter	T_j	---	---	227	ps
TX Disable Asserted	P_{OFF}	---	---	-35	dBm
TX Fault Output - High	V_{FH}	2.4	---	V_{cc}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V
TX Disable Voltage - High	V_{DH}	2.4	---	V_{cc}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{ini}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitors.
2. Single ended will be 75 ohm for each signal line.
3. Output of coupling optical power into 50/125 μm or 62.5/125 μm MMF.
4. Optical eye diagram is compliant with IEEE 802.3z standard.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	770	---	860	nm
Receiver Overload	P_{max}	0	---	---	dBm
Receiver Sensitivity ¹	P_I	---	---	-18	dBm
Differential Output Voltage	ΔV_o	0.5	---	1.2	V
Differential Input Impedance ²	Z	---	150	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	350	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-18	dBm
RX Signal Loss – Deasserted	P_{SD-}	-31	---	---	dBm
RX Signal Loss Output - High	V_{RL+}	2.4	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.5	V
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μs
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μs
Serial ID Clock Rate	f_c	---	---	100	kHz

Notes:

1. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
2. Single ended will be 75 ohm for each signal line.

Typical Transmission Distance for Multimode Fibers @ 850 nm

Data Rate	Fiber Type	Distance (m)	Data Rate	Fiber Type	Distance (m)
1.0625 Gb/s	50 μm , 2000 MHz*km	860	2.125 Gb/s	50 μm , 2000 MHz*km	500
	50 μm , 500 MHz*km	500		50 μm , 500 MHz*km	300
	50 μm , 400 MHz*km	450		50 μm , 400 MHz*km	260
	62.5 μm , 200 MHz*km	300		62.5 μm , 200 MHz*km	150
	62.5 μm , 160 MHz*km	250		62.5 μm , 160 MHz*km	120
1.25 Gb/s	50 μm , 500 MHz*km	550	10 Gb/s	50 μm , 2000 MHz*km	300
	50 μm , 400 MHz*km	500		50 μm , 500 MHz*km	150
	62.5 μm , 200 MHz*km	275		62.5 μm , 200 MHz*km	75
	62.5 μm , 160 MHz*km	220		62.5 μm , 160 MHz*km	---

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



1.25 Gb/s, 1310 nm Multimode, 2 km GBIC Dual SC Package

Description

This fiber optics transceiver is designed with high performance 1310 nm FP laser for use of multimode fibers. This product is compliant with Gigabit Interface Converter (GBIC) specifications. This product can be used at 1.0625 Gb/s for Fiber Channel or 1.25 Gb/s for Gigabit Ethernet applications.

The transceiver uses duplex SC connector for the optical interface and SCA-2 host connector for the electrical interface. The product is hot pluggable in the z-axis along the transceiver module. The transceiver reaches more than 2 km of transmission distance with high-grade multimode fibers and > 10 dB of power budget. The products are RoHS compliant.





Lead-Free

GBC-1250LX-AT2K



1.25 Gb/s, 2⁷-1 NRZ Data Eye Pattern



Key Features

- 1310 nm multimode, 1.0625/1.25 Gb/s data rates
- > 10 dB power budget
- Duplex SC connector optical interface
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O logics
- 2 km with standard multimode fibers
- Compliant with IEEE 802.3z, 1000BASE-LX
- Compliant with Fiber Channel Standard
- TTL Signal detect function to monitor optical signals
- -40–85 °C operating temperatures available
- Single 3.3/5 V power supply

Applications

- ✓ 1X Fiber Channel
- ✓ Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: GBC-1250LX-AT2K

Description:

1310 nm 1.0625/1.25 Gb/s, multimode, GBIC Fiber Optics Transceiver, 2 km reach, 0-70°C, RoHS compliant.

* Add "-T" in the Part Number for extended temperature range -40–85 °C, i.e., GBC-1250LX-AT2K-T.

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-40	25	85	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	5.25	V
Supply Current	---	200	300	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{CC}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.4	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	ohm
Optical Output Power ³	P_o	-9	---	-1	dBm
Optical Wavelength	λ_o	1270	1310	1355	Nm
Extinction Ratio	ET	9	---	---	dB
Spectral Width (rms)	$\Delta\lambda$	---	---	4	nm
Relative Intensity Noise	RIN	---	---	-120	dB/Hz
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	260	ps
Total Jitter	T_j	---	---	227	ps
TX Disable Asserted	P_{OFF}	---	---	-45	dBm
TX Fault Output - High	V_{FH}	2.4	---	V_{CC}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V
TX Disable Voltage - High	V_{DH}	2.4	---	V_{CC}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.
3. Output of average coupling optical power into 50/125 or 62.5/125 μm MMF.
4. Optical eye diagram is compliant with IEEE 802.3z standard.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Receiver Overload	P_{max}	-1	---	---	dBm
Receiver Sensitivity ¹	P_I	---	---	-19	dBm
Operating Wavelength	λ_c	1260	---	1610	nm
Differential Output Voltage	ΔV_o	0.5	---	1.2	V
Differential Input Impedance ²	Z	---	150	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time	T_r/T_f	---	---	350	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-19	dBm
RX Signal Loss – Deasserted	P_{SD-}	-35	---	---	dBm
RX Signal Loss Output - High	V_{RL+}	2.4	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.5	V
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s
Serial ID Clock Rate	f_c	---	---	100	kHz

Notes:

1. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
2. Single ended will be 75 ohm for each signal line.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



1.25 Gb/s, 1310 nm Single Mode, 10 – 50 km GBIC Dual SC Package

Description

OptixCom's single mode fiber optics transceiver is designed with high performance 1310 nm FP laser and compliant with Gigabit Interface Converter (GBIC) specifications. This product can be used at 1.0625 Gb/s for Fiber Channel or 1.25 Gb/s for Gigabit Ethernet applications with 10 - 50 km transmission distance with single mode fibers. .

The transceiver uses duplex SC connector for the optical interface and SCA-2 host connector for the electrical interface. The product is hot pluggable in the z-axis along the transceiver module. The products are RoHS compliant.



Lead-Free

GBC-1250LX-ATXXK
(XX = 10, 40, 50)




Key Features

- 1310 nm single mode, 1.0625/1.25 Gb/s data rates
- 10 – 50 km reach, 11 – 24 dB power budget
- Duplex SC connector optical interface
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O logics
- Single 3.3/5 V power supply
- TTL signal detect to monitor optical signals
- Compliant with IEEE 802.3z, 1000BASE-LX
- Compliant with Fiber Channel Standard
- -40–85 °C operating temperatures available
- RoHS compliant

Applications

- ✓ Fiber Channel, Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

1.25 Gb/s, 2⁷-1 NRZ Data Eye Pattern

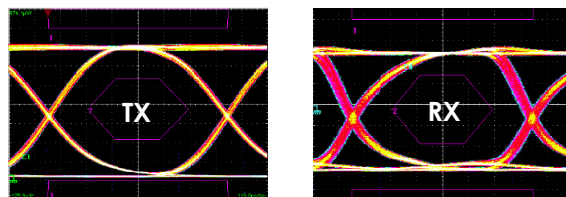

Ordering Information

Part Number: GBC-1250LX-ATXXK

Description:

1310 nm 1.0625/1.25 Gb/s, single mode, GBIC Fiber Optics Transceiver, XX km reach, 0-70°C

* Add "-T" in the Part Number for extended temperature range -40–85 °C, i.e., GBC-1250LX-AT10K-T.

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-40	25	85	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	5.25	V

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{CC}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA

General Transmitter Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.4	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	ohm
Relative Intensity Noise	RIN	---	---	-120	dB/Hz
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	260	ps
Total Jitter	T_j	---	---	227	ps
TX Disable Asserted	P_{OFF}	---	---	-45	dBm
TX Fault Output - High	V_{FH}	2.4	---	V_{CC}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V
TX Disable Voltage – High	V_{DH}	2.4	---	V_{CC}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.
3. Optical eye diagram is compliant with IEEE 802.3z standard.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



General Receiver Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Output Voltage ¹	ΔV_o	0.5	---	1.2	V
Differential Input Impedance ²	Z	---	150	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time	T_r/T_f	---	---	350	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-20	dBm
RX Signal Loss – Deasserted	P_{SD-}	-31	---	---	dBm
RX Signal Loss Output - High	V_{RL+}	2.4	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.5	V
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s
Serial ID Clock Rate	f_c	---	---	100	kHz

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	-9.5	---	-3	dBm
Optical Wavelength	λ_o	1270	1310	1355	nm
Extinction Ratio	ET	9	---	---	dB
Spectral Width (rms)	$\Delta\lambda$	---	---	2.5	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-20	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-20	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125 μ m SMF.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA for 3.3V and 400 mA for 5V.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	-4	---	+3	dBm
Optical Wavelength	λ_o	1280	1310	1340	nm
Extinction Ratio	ET	7	---	---	dB
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-24	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-24	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125 μ m SMF.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA for 3.3V and 400 mA for 5V.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	0	---	+5	dBm
Optical Wavelength	λ_o	1280	1310	1340	nm
Extinction Ratio	ET	7	---	---	dB
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-2	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-24	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-24	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125 μm SMF.
2. Test at 1.25 Gb/s, $2^7 - 1$ PRBS data pattern, and $> 1 \times 10^{-12}$ of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA for 3.3V and 400 mA for 5V.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



1.25 Gb/s, 1550 nm Single Mode, 30 – 80 km GBIC Dual SC Package

Description

OptixCom's single mode fiber optics transceiver is designed with high performance 1550 nm laser and compliant with Gigabit Interface Converter (GBIC) specifications. This product can be used at 1.0625 Gb/s for Fiber Channel or 1.25 Gb/s for Gigabit Ethernet applications with 30 - 80 km transmission distance with single mode fibers. .

The transceiver uses duplex SC connector for the optical interface and SCA-2 host connector for the electrical interface. The product is hot pluggable in the z-axis along the transceiver module. The products are RoHS compliant.



Lead-Free

GBC-1250EX-ATXXK
(XX = 30, 60, 80)




Key Features

- 1550 nm single mode, 1.0625/1.25 Gb/s data rates
- 30 – 80 km reach, 12 – 24 dB power budget
- Duplex SC connector optical interface
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O logics
- Single 3.3/5 V power supply
- TTL signal detect to monitor optical signals
- Compliant with IEEE 802.3z, 1000BASE-LX
- Compliant with Fiber Channel Standard
- -40–85 °C operating temperatures available
- RoHS compliant

Applications

- ✓ Fiber Channel, Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

1.25 Gb/s, 2⁷-1 NRZ Data Eye Pattern

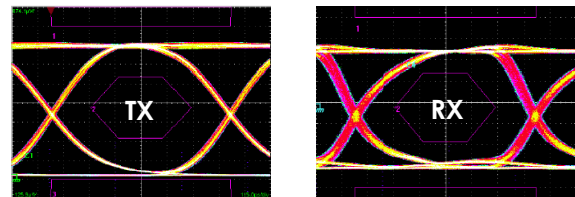

Ordering Information

Part Number: GBC-1250EX-ATXXK

Description:

1550 nm 1.0625/1.25 Gb/s, single mode, GBIC Fiber Optics Transceiver, XX km reach, 0-70°C

* Add "-T" in the Part Number for extended temperature range -40–85 °C, i.e., GBC-1250EX-AT60K-T.

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-40	25	85	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	5.25	V

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{CC}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA

General Transmitter Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.65	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	ohm
Relative Intensity Noise	RIN	---	---	-120	dB/Hz
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	260	ps
Total Jitter	T_j	---	---	227	ps
TX Disable Asserted	P_{OFF}	---	---	-45	dBm
TX Fault Output - High	V_{FH}	2.4	---	V_{CC}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V
TX Disable Voltage – High	V_{DH}	2.4	---	V_{CC}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.
3. Optical eye diagram is compliant with IEEE 802.3z standard.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



General Receiver Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Output Voltage ¹	ΔV_o	0.4		2.0	V
Differential Input Impedance ²	Z		150		Ohm
Optical Return Loss	OL	12			dB
Rise/Fall Time	T_r/T_f			350	ps
RX Signal Loss – Asserted	P_{SD+}			-20	dBm
RX Signal Loss – Deasserted	P_{SD-}	-31			dBm
RX Signal Loss Output - High	V_{RL+}	2.4		V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0		0.5	V
RX Signal Loss Assert Time	T_{RL+}			100	μ s
RX Signal Loss Deassert Time	T_{RL-}			100	μ s
Serial ID Clock Rate	f_c			100	kHz

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	-9	---	-3	dBm
Optical Wavelength	λ_o	1520	1550	1580	nm
Extinction Ratio	ET	7	---	---	dB
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-21	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-21	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125 μ m SMF.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA for 3.3V and 400 mA for 5V.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	-4	---	+1	dBm
Optical Wavelength	λ_o	1520	1550	1580	nm
Extinction Ratio	ET	7	---	---	dB
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-24	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-24	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125 μ m SMF.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA for 3.3V and 400 mA for 5V.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	0	---	+5	dBm
Optical Wavelength	λ_o	1520	1550	1580	nm
Extinction Ratio	ET	7	---	---	dB
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-24	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-24	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 9/125 μm SMF.
2. Test at 1.25 Gb/s, $2^7 - 1$ PRBS data pattern, and $> 1 \times 10^{-12}$ of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from V_{cc} is 300 mA for 3.3V and 400 mA for 5V.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Description

OptixCom's CWDM transceivers are designed with high performance DFB laser and cover the wavelength spectrum from 1270 nm to 1450 nm, with industry standard 20 nm spacing. The product is compliant with Gigabit Interface Converter (GBIC) specifications. This product can be used at 1.0625 Gb/s for Fiber Channel or 1.25 Gb/s for Gigabit Ethernet applications.

Two transceiver designs reach up to 40 km and 60 km of distances with 20 dB and 24 dB of power budget, respectively, for standard single mode fibers. The products are RoHS compliant.



Lead-Free

GBC-1250CLX-AT40K-XX
GBC-1250CLX-AT60K-XX



Key Features

- 1270 - 1450 nm single mode, 1.0625/1.25 Gb/s
- Duplex SC connector optical interface
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O logics
- 40 km with 20 dB power budget
- 60 km with 24 dB power budget
- Compliant with IEEE 802.3z, 1000BASE-LX
- Compliant with Fiber Channel Standard
- TTL Signal detect to monitor optical signals
- Single 3.3/5 V power supply
- RoHS compliant

Applications

- ✓ 1X Fiber Channel
- ✓ Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: GBC-1250CLX-AT40K-XX

Description:

CWDM 1270 - 1450 nm 1.0625/1.25 Gb/s GBIC Transceiver, 40 km reach, 1XX0 nm wavelength, 0-70°C.

Part Number: GBC-1250CLX-AT60K-XX

Description:

CWDM 1270 - 1450 nm, 1.0625/1.25 Gb/s GBIC Transceiver, 60 km reach, 1XX0 nm wavelength, 0-70°C

XX specifies the wavelength described below. For example, GBC-1250CLX-AT40K-27 is the 1270 nm module.

<u>XX</u>	Wavelength	<u>XX</u>	Wavelength
27	1270 nm	37	1370 nm
29	1290 nm	39	1390 nm
31	1310 nm	41	1410 nm
33	1330 nm	43	1430 nm
35	1350 nm	45	1450 nm

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	5.25	V
Supply Current	---	250	400	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{CC}	V
Operating Current	I_{OP}	---	400	mA
Output Current	I_O	---	50	mA

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.65	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	ohm
Optical Output Power ³ (GBC-1250CLX-AT40K-XX)	P_O	-4	---	+1	dBm
Optical Output Power ³ (GBC-1250CLX-AT60K-XX)	P_O	-1	---	+4	dBm
Center Wavelength – 1270 nm	λ_c	1264.5	1270	1277.5	nm
Center Wavelength – 1290 nm	λ_c	1284.5	1290	1297.5	nm
Center Wavelength – 1310 nm	λ_c	1304.5	1310	1317.5	nm
Center Wavelength – 1330 nm	λ_c	1324.5	1330	1337.5	nm
Center Wavelength – 1350 nm	λ_c	1344.5	1350	1357.5	nm
Center Wavelength – 1370 nm	λ_c	1364.5	1370	1377.5	nm
Center Wavelength – 1390 nm	λ_c	1384.5	1390	1397.5	nm
Center Wavelength – 1410 nm	λ_c	1404.5	1410	1417.5	nm
Center Wavelength – 1430 nm	λ_c	1424.5	1430	1437.5	nm
Center Wavelength – 1450 nm	λ_c	1444.5	1450	1457.5	nm
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm
Extinction Ratio	ET	7	---	---	dB
Side Mode Suppression Ratio	$SMSR$	30	---	---	dB
Relative Intensity Noise	RIN	---	---	-120	dB/Hz
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	260	ps
Total Jitter	T_j	---	---	227	ps
TX Disable Asserted	P_{OFF}	---	---	-35	dBm
TX Fault Output - High	V_{FH}	2.4	---	V_{CC}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V

Transmitter Electro-Optical Characteristics (cont.)

Parameter	Symbol	Min.	Typical	Max.	Units
TX Disable Voltage – High	V_{DH}	2.4	---	V_{CC}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μ s
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μ s
TX Disable Time to Start Reset	T_{reset}	10	---	---	μ s

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.
3. Output of average coupling optical power into 9/125 μ m SMF.
4. Optical eye diagram is compliant with IEEE 802.3z standard.

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ¹	P_I	---	-26	-24	dBm
Differential Output Voltage	ΔV_o	0.4	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time	T_r/T_f	---	---	350	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-24	dBm
RX Signal Loss – Deasserted	P_{SD-}	-31	---	---	dBm
RX Signal Loss Output - High	V_{RL+}	2.4	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.5	V
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s

Notes:

1. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
2. Single ended will be 75 ohm for each signal line.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Description

OptixCom's CWDM transceivers are designed with high performance DFB laser and cover the wavelength spectrum from 1470 nm to 1610 nm, with industry standard 20 nm spacing. The product is compliant with Gigabit Interface Converter (GBIC) specifications. This product can be used at 1.0625 Gb/s for Fiber Channel or 1.25 Gb/s for Gigabit Ethernet applications.

Two transceiver designs reach up to 60 km and 80 km of distances with 20 dB and 24 dB of power budget, respectively, for standard single mode fibers. The products are RoHS compliant.



Lead-Free

GBC-1250CEX-AT60K-XX
GBC-1250CEX-AT80K-XX



Key Features

- 1470 - 1610 nm single mode, 1.0625/1.25 Gb/s
- Duplex SC connector optical interface
- Z-axis hot pluggable with SCA-2 host connector
- AC coupling LVPECL differential I/O logics
- 60 km with 20 dB power budget
- 80 km with 24 dB power budget
- Compliant with IEEE 802.3z, 1000BASE-EX
- Compliant with Fiber Channel Standard
- TTL Signal detect to monitor optical signals
- Single 3.3/5 V power supply
- RoHS compliant

Applications

- ✓ 1X Fiber Channel
- ✓ Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Bus extension
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: GBC-1250CEX-AT60K-**XX**
Description

CWDM 1470 - 1610 nm 1.0625/1.25 Gb/s GBIC Transceiver, 60 km reach, 1**XX**0 nm wavelength, 0-70°C.

Part Number: GBC-1250CEX-AT80K-**XX**
Description:

CWDM 1470 – 1610 nm 1.0625/1.25 Gb/s GBIC Transceiver, 80 km reach, 1**XX**0 nm wavelength, 0-70°C.

XX specifies the wavelength as below. For example, GBC-1250CEX-AT60K-47 is the 1470 nm module.

XX	Wavelength	XX	Wavelength
47	1470 nm	55	1550 nm
49	1490 nm	57	1570 nm
51	1510 nm	59	1590 nm
53	1530 nm	61	1610 nm

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	5.25	V
Supply Current	---	250	400	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{CC}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.65	---	2.0	V
Differential Input Impedance ²	Z		150		ohm
Optical Output Power ³ (GBC-1250CEX-AT60K-XX)	P_o	-4	---	+1	dBm
Optical Output Power ³ (GBC-1250CEX-AT80K-XX)	P_o	0	+2	+5	dBm
Center Wavelength – 1470 nm	λ_c	1464.5	1470	1477.5	nm
Center Wavelength – 1490 nm	λ_c	1484.5	1490	1497.5	nm
Center Wavelength – 1510 nm	λ_c	1504.5	1510	1517.5	nm
Center Wavelength – 1530 nm	λ_c	1524.5	1530	1537.5	nm
Center Wavelength – 1550 nm	λ_c	1544.5	1550	1557.5	nm
Center Wavelength – 1570 nm	λ_c	1564.5	1570	1577.5	nm
Center Wavelength – 1590 nm	λ_c	1584.5	1590	1597.5	nm
Center Wavelength – 1610 nm	λ_c	1604.5	1610	1617.5	nm
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm
Extinction Ratio	ET	9	---	---	dB
Side Mode Suppression Ratio	$SMSR$	30	---	---	dB
Relative Intensity Noise	RIN	---	---	-120	dB/Hz
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	260	ps
Total Jitter	T_j	---	---	227	ps
TX Disable Asserted	P_{OFF}	---	---	-35	dBm
TX Fault Output - High	V_{FH}	2.4	---	V_{CC}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11



Transmitter Electro-Optical Characteristics (cont.)

Parameter	Symbol	Min.	Typical	Max.	Units
TX Disable Voltage – High	V_{DH}	2.4	---	V_{CC}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μ s
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μ s
TX Disable Time to Start Reset	T_{reset}	10	---	---	μ s

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitor.
2. Single ended will be 75 ohm for each signal line.
3. Output of average coupling optical power into 9/125 μ m SMF.
4. Optical eye diagram is compliant with IEEE 802.3z

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ¹	P_I	---	-26	-24	dBm
Differential Output Voltage	ΔV_o	0.4	---	2.0	V
Differential Input Impedance ²	Z	---	150	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time	T_r/T_f	---	---	350	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-24	dBm
RX Signal Loss – Deasserted	P_{SD-}	-31	---	---	dBm
RX Signal Loss Output - High	V_{RL+}	2.4	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.5	V
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s

Notes:

1. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
2. Single ended will be 75 ohm for each signal line.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11

