

Dual Bi-Directional (BiDi) SFP Optical Transceivers



Features

- Dual BiDi channels in a compact SFP package
- TX1310/RX1490 and TX1490/RX1310 nm wavelength
- 4x increase bandwidth capacity in existing fiber network
- Single mode, 1.25 Gb/s, 20 km reach
- Duplex LC connector, Z-axis hot pluggable
- AC coupling LVPECL differential I/O, TTL signal detect

Applications

- ✓ Ethernet, Fiber Channel, ATM/SONET, SDH
- ✓ High speed I/O bus extension, systems interconnects
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect



**Two Bi-Directional Channels in one SFP.
4X Bandwidth Increase!**

Products Selection Guide					
Part Number*	TX Wavelength	Data Rate	Power Budget	Distance**	Temp. Range
1.25 Gb/s, Single Mode Applications, 20 km					
CBD-1250T3R4-AT20K	1310 nm	1.25 Gb/s	14 dB	20 km	0 – 70°C/-40 – 85°C
CBD-1250T4R3-AT20K	1490 nm	1.25 Gb/s	14 dB	20 km	0 – 70°C/-40 – 85°C

*: Add "-T" in the Part Number for products with extended temperature range -40–85 °C. For example, CBD-1250T3R4-AT20K-T.

***: The indicated distance is for reference only, not guaranteed specifications. The actual transmission distance depends on system configuration and power budget. For single mode fibers, the typical loss is 0.25 dB/km @ 1550 nm and 0.35 dB/km @ 1310 nm.

1.25 Gb/s, SFP LC, Dual BiDi TX 1310/RX1490 nm Single Mode, 20 km Distance

Description

This compact SFP has dual-channel Bi-Directional (BiDi) optics for single mode applications. This module increases by 4x instantly the total bandwidth capacity of an existing fiber cable infrastructure. Built upon OptixCom's BiDi technology, this compact design has set a new standard for increasing port density requirement in the networking industry.

This optical transceiver integrates two BiDi channels transmitting at 1310 nm and receiving at 1490 nm wavelength. It operates at 1.25 Gb/s with 20 km of transmission distance and > 14 dB power budget.

The product is compliant with CSFP MSA Option 2 and SFF-8472. It's RoHS compliant.




Lead-Free

CBD-1250T3R4-AT20K



1.25 Gb/s, 2⁷-1 NRZ Data Eye pattern

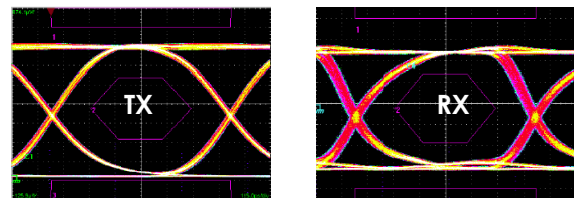

Key Features

- 2x Bi-Directional channels in one SFP package
- Single Mode, 1.25 Gb/s
- TX 1310/RX 1490 nm wavelength
- > 14 dB power budget, 20 km reach
- Single 3.3 V power supply
- Z-axis hot pluggable
- Compliant with CSFP MSA Option 2
- Dual LC connector optical interface
- AC coupling LVPECL differential I/O logics
- -40–85 °C extended temperatures available
- RoHS compliant

Applications

- ✓ Fiber Channel, Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect

Ordering Information

Part Number: CBD-1250T3R4-AT20K

Description:

1.25 Gb/s, Single Mode, SFP Dual BIDI Optical Transceiver, TX 1310 nm /RX 1490 nm, 20 km reach, 0 -70°C.

* Add "-T" in the Part Number for extended temperature range -40–85 °C, i.e., CBD-1250T3R4-AT20K-T.

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-40	25	85	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	3.5	V
Supply Current	---	500	550	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	4.0	V
Input Voltage	V_{IN}	-0.5	$V_{CC} + 0.3$	V
Output Current	I_o	---	50	mA
Soldering Temperature (10 sec. on leads)	T_{sd}	---	260	°C

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.4	---	1.8	V
Differential Input Impedance ²	Z	---	100	---	ohm
Optical Output Power ³	P_o	-5	---	0	dBm
Optical Wavelength	λ_o	1260	1310	1360	nm
Rise/Fall Time (20%~80%)	T_r/T_f	---	---	0.16	ns
Extinction Ratio	ET	9	---	---	dB
TX Disable Power	P_{TD}	---	---	-30	dBm
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm
TX Disable Voltage – High	V_{DH}	2.0	---	V_{CC}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.8	V
TX Fault Output - High	V_{FH}	2.0	---	V_{CC}	V
TX Fault Output - Low	V_{FL}	0	---	0.8	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Applied to AC LVPECL I/O coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.
3. Output of coupling optical power into 9/125 μm SMF.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



Receiver Electro-Optical Characteristics


Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Impedance	Z	---	100	---	Ohm
Differential Output Voltage ¹	ΔV_o	0.4	---	1.8	V
Optical Wavelength	λ_o	1470	1490	1510	nm
Receiver Overload	P_{max}	0	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-19	dBm
Optical Return Loss	OL	12	---	---	dB
RX Signal Loss – Deasserted	P_{RL-}	-30	---	---	dBm
RX Signal Loss – Asserted	P_{RL+}	---	---	-19	dBm
Signal Detect Hysteresis	$P_{RL+} - P_{RL-}$	1	---	4	dB
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s
RX Signal Loss Output - High	V_{RL+}	2.0	---	V_{cc}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.8	V

Notes:

1. Applied to AC LVPECL I/O coupling. See the design guide for proper termination.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER)

PIN Assignment and Description

CSFP MSA option 2

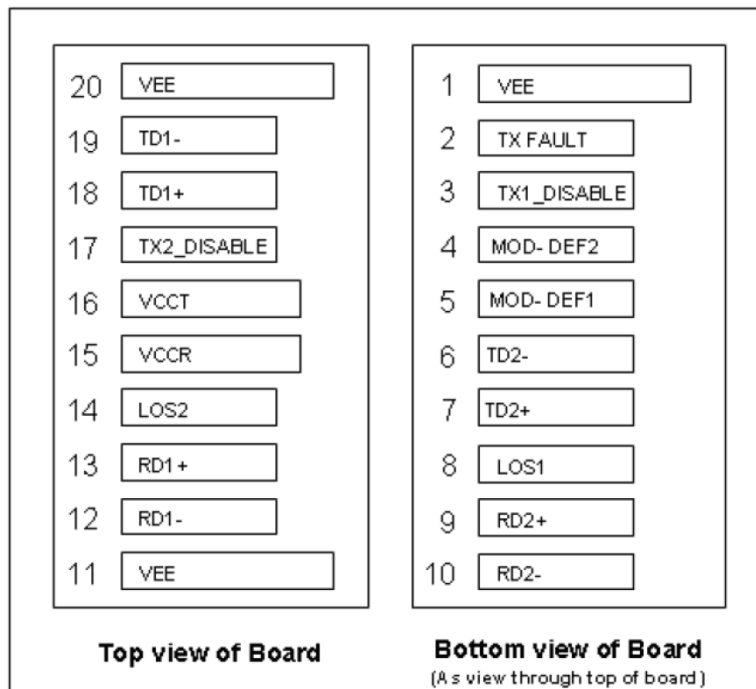

1.25 Gb/s, SFP LC, Dual BiDi TX 1490/RX1310 nm Single Mode, 20 km Distance

Description

This compact SFP has dual-channel Bi-Directional (BiDi) optics for single mode applications. This module increases by 4x instantly the total bandwidth capacity of an existing fiber cable infrastructure. Built upon OptixCom's BiDi technology, this compact design has set a new standard for increasing port density requirement in the networking industry.

This optical transceiver integrates two BiDi channels transmitting at 1490 nm and receiving at 1310 nm wavelength. It operates at 1.25 Gb/s with 20 km of transmission distance and > 14 dB power budget.

The product is compliant with CSFP MSA Option 2 and SFF-8472. It's RoHS compliant.





Lead-Free

CBD-1250T4R3-AT20K



1.25 Gb/s, 2⁷-1 NRZ Data Eye pattern



Key Features

- 2x Bi-Directional channels in one SFP package
- Single Mode, 1.25 Gb/s
- TX 1490/RX 1310 nm wavelength
- > 14 dB power budget, 20 km reach
- Single 3.3 V power supply
- Z-axis hot pluggable
- Compliant with CSFP MSA Option 2
- Dual LC connector optical interface
- AC coupling LVPECL differential I/O logics
- -40–85 °C extended temperatures available
- RoHS compliant

Applications

- ✓ Fiber Channel, Gigabit Ethernet
- ✓ High speed I/O for file server
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect

Ordering Information

Part Number: CBD-1250T4R3-AT20K

Description:

1.25 Gb/s, Single Mode, SFP Dual BIDI Optical Transceiver, TX 1490 nm/RX 1310 nm, 20 km reach, 0 -70°C.

* Add "-T" in the Part Number for extended temperature range -40–85 °C, i.e., CBD-1250T4R3-AT20K-T.

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-40	25	85	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	3.5	V
Supply Current	---	500	550	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.5	4.0	V
Input Voltage	V_{IN}	-0.5	$V_{CC} + 0.3$	V
Output Current	I_o	---	50	mA
Soldering Temperature (10 sec. on leads)	T_{sd}	---	260	°C

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.4	---	1.8	V
Differential Input Impedance ²	Z	---	100	---	ohm
Optical Output Power ³	P_o	-5	---	0	dBm
Optical Wavelength	λ_o	1470	1490	1510	nm
Rise/Fall Time (20%~80%)	T_r/T_f	---	---	0.16	ns
Extinction Ratio	ET	9	---	---	dB
TX Disable Power	P_{TD}	---	---	-30	dBm
Spectral Width (-20 dB)	$\Delta\lambda$	---	---	1	nm
TX Disable Voltage – High	V_{DH}	2.0	---	V_{CC}	V
TX Disable Voltage – Low	V_{DL}	0	---	0.8	V
TX Fault Output – High	V_{FH}	2.0	---	V_{CC}	V
TX Fault Output – Low	V_{FL}	0	---	0.8	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Applied to AC LVPECL I/O coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.
3. Output of coupling optical power into 9/125 μm SMF.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Impedance	Z	---	100	---	Ohm
Differential Output Voltage ¹	ΔV_o	0.4	---	1.8	V
Optical Wavelength	λ_o	1390	1310	1330	nm
Receiver Overload	P_{max}	0	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-19	dBm
Optical Return Loss	OL	12	---	---	dB
RX Signal Loss – Deasserted	P_{RL-}	-30	---	---	dBm
RX Signal Loss – Asserted	P_{RL+}	---	---	-19	dBm
Signal Detect Hysteresis	$P_{RL+} - P_{RL-}$	1	---	4	dB
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s
RX Signal Loss Output - High	V_{RL+}	2.0	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.8	V

Notes:

1. Applied to AC LVPECL I/O coupling. See the design guide for proper termination.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER)

PIN Assignment and Description

CSFP MSA option 2

