

1.25 Gb/s, SFP LC Package, BIDI TX1310/RX1550, TX1550/RX1310 nm Multimode, 500 m Distance



Description

The bi-directional (BIDI) transceiver product is unique in that only one single fiber (multimode) is required to transmit and receive signals simultaneously. That means the total bandwidth capacity of an existing cable infrastructure can be doubled instantly. The typical design of a BIDI transceiver uses a 1310 nm LD to transmit and 1550 nm PD to receive, and vice versa for the matching one (1310 nm to receive and 1550 nm to transmit) at the other end to make a complete link.

OptixCom's SFP transceivers are compliant with SFP Multi-Source Agreement (MSA). The BIDI transceivers utilize advanced filter optics to separate the two wavelength with more than 40 dB of isolation. These transceivers operate at 1.25 Gb/s for 500m transmission distance with multimode fibers. The products are RoHS compliant.



Lead-Free


BD7-1250T3R5-ATM500M
BD7-1250T5R3-ATM500M



Key Features

- Multimode, 1.25 G/s data rate
- TX1310/RX1550 and TX1550/RX1310 nm wavelength
- 500 m reach and single 3.3 V power supply
- 10 dB power budget
- Z-axis hot pluggable
- SFF-8472 MSA Compliant
- Single LC connector optical interface
- AC coupling LVPECL differential I/O logics
- TTL RX_LOS signal detect to monitor optical signals
- RoHS compliant

1.25 Gb/s, 2⁷-1 NRZ Data Eye pattern

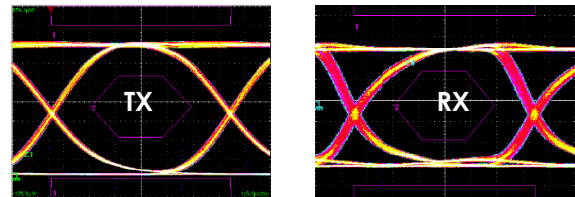

Ordering Information

Part Number: BD7-1250T3R5-ATM500M

Description:
1.25 Gb/s, Multimode, SFP BIDI Transceiver, TX 1310 nm and RX 1550 nm, 500 m reach, 0 – 70 °C.

Part Number: BD7-1250T5R3-ATM500M

Description:
1.25 Gb/s, Multimode, SFP BIDI Transceiver, TX 1550 nm and RX 1310 nm, 500 m reach, 0 – 70 °C.

Applications

- ✓ FTTH, FTTX, Gigabit Ethernet, SONET, ATM
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter, bus extension
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
Data Rate	---	1.25	1.3	Gb/s
Supply Voltage	3.1	3.3	3.5	V
Supply Current	---	200	300	mA

U.S.A. Office: Optix Communications, Inc.

17901 Von Karman Avenue, Suite 600,
Irvine, CA 92614

Tel: (949) 679-5712 Fax: (949) 420-2134

<http://www.OptixCom.com>

<http://www.OpticalTransceiver.com>

Email: Support@OptixCom.com

Germany Office: OptixCom GmbH

Freiherr vom Stein Strasse 19, 60323
Frankfurt am Main, Germany

Tel: +49 (0)69 7953-3646

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{cc}	-0.5	4.0	V
Input Voltage	V_{IN}	-0.5	V_{cc}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA
Soldering Temperature (10 sec. on leads)	T_{sd}	---	260	°C

General Transmitter Characteristics (FP Laser)

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.4	---	2.0	V
Differential Input Impedance ²	Z	---	100	---	ohm
Rise/Fall Time (20% -80%)	T_r/T_f	---	---	260	ps
Side Mode Suppression Ratio	SMSR	30	---	---	dB
Relative Intensity Noise	RIN	---	---	-120	dB
Total Jitter	T_j	---	---	227	ps
TX Disable Power	P_{AT}	---	---	-45	dBm
TX Disable Voltage – High	V_{DH}	2.4	---	V_{cc}	V
TX Disable Voltage - Low	V_{DL}	0	---	0.5	V
TX Fault Output - High	V_{FH}	2.4	---	V_{cc}	V
TX Fault Output - Low	V_{FL}	0	---	0.5	V
TX Disable Assert Time	T_{ass}	---	---	10	μs
TX Disable Deassert Time	T_{disass}	---	---	1.0	ms
Time to Initialize	T_{as}	---	---	300	ms
TX Fault from Fault to Assertion	T_{fault}	---	---	100	μs
TX Disable Time to Start Reset	T_{reset}	10	---	---	μs

Notes:

1. Module is designed for AC LVPECL coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.

General Receiver Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Output Voltage ¹	ΔV_o	0.5	---	1.2	V
Differential Input Impedance ²	Z	---	100	---	Ohm
Optical Return Loss	OL	14	---	---	dB
Rise/Fall Time (20% -80%)	T_r/T_f	---	---	350	ps
Signal Detect Hysteresis	$P_{SD+} - P_{SD}$	1	---	---	dB
Crosstalk		---	---	-40	dB
RX Signal Loss Output - High	V_{RL+}	2.4	---	V_{CC}	V
RX Signal Loss Output - Low	V_{RL-}	0	---	0.5	V
RX Signal Loss Assert Time	T_{RL+}	---	---	100	μ s
RX Signal Loss Deassert Time	T_{RL-}	---	---	100	μ s
Serial ID Clock Rate	f_C	---	---	100	kHz

Notes:

1. Module is designed for AC LVPECL coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Optical Output Power ¹	P_o	-8	---	0	dBm
Optical Wavelength (BD7-1250T3R5-ATM500M)	λ_o	1260	1310	1360	nm
Optical Wavelength (BD7-1250T5R3-ATM500M)	λ_o	1480	1550	1580	nm
Extinction Ratio	ET	9	---	---	dB
Spectral Width (rms)	$\Delta\lambda$	---	---	4	nm

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength (BD7-1250T3R5-ATM500M)	λ_c	1500	---	1600	nm
Operating Wavelength (BD7-1250T5R3-ATM500M)	λ_c	1260	---	1360	nm
Receiver Overload	P_{max}	-3	---	---	dBm
Receiver Sensitivity ²	P_I	---	---	-18	dBm
Signal Detect– Asserted	P_{SD+}	---	---	-18	dBm
Signal Detect– Deasserted	P_{SD-}	-35	---	---	dBm

Notes:

1. Output of coupling optical power into 50/125 or 62.5/125 μm MMF.
2. Test at 1.25 Gb/s, 2⁷ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
3. Optical eye diagram is compliant with IEEE 802.3z standard.
4. Maximum supply current for the transceiver from Vcc is 300 mA.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11

